

aluminium roof lantern surveying guide



Upstand position cross section

- When specifying the dimensions of your lantern, you should provide the external dimensions of your upstand and the fitted water proof membrane
- We also recommend that you increase the size of the Lantern by 12mm in both length and width which will give you 6mm overhang all round

Example


Upstand (inc Membrane):
1840 x 1220mm

Overhang:
12mm x 12mm

Roof Size:
1852 x 1232

- Upstand must be a minimum of 69mm wide (width of lantern eaves beam) level and square.

It is the responsibility of the installer to determine the finishing detail of the inside.

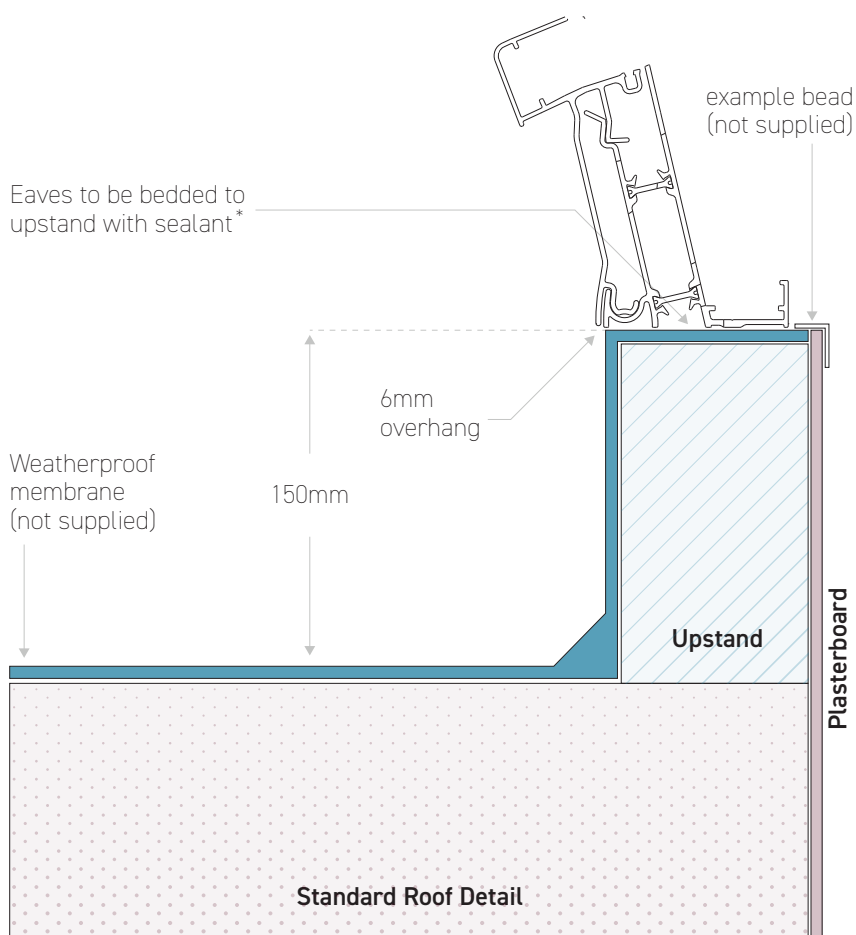

*Sealant to be applied to the underside of the eaves as per installation guide instructions only



24mm glazing



25 degree fixed pitch

Download the installation guide from korniche.co.uk